


## Fast Recovery Epitaxial Diode (FRED) Module

### PSND 150E

$I_{FAV} = 208 \text{ A}$   
 $V_{RRM} = 800-1200 \text{ V}$

Preliminary Data Sheet

$V_{RSM}$ V	$V_{RRM}$ V	Type
800	800	PSND 150E/08
1000	1000	PSND 150E/10
1200	1200	PSND 150E/12



Symbol	Test Conditions	Maximum Ratings
$I_{FAV}$	$T_c = 70^\circ\text{C}$	208 A
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	2500 A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	2700 A
	$T_{VJ} = T_{VJM}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	2250 A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	2400 A
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	31200 $\text{A}^2 \text{ s}$
	$t = 8.3 \text{ ms}$ (60 Hz), sine	30200 $\text{A}^2 \text{ s}$
	$T_{VJ} = T_{VJM}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	25300 $\text{A}^2 \text{ s}$
	$t = 8.3 \text{ ms}$ (60 Hz), sine	23900 $\text{A}^2 \text{ s}$
$T_{VJ}$		-40 ... + 150 $^\circ\text{C}$
$T_{VJM}$		150 $^\circ\text{C}$
$T_{stg}$		-40 ... + 125 $^\circ\text{C}$
$V_{ISOL}$	50/60 HZ, RMS $t = 1 \text{ min}$	2500 V ~
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3000 V ~
$M_d$	Mounting torque (M6)	5 Nm
	Terminal connection torque (M6)	5 Nm
Weight	typ.	270 g

### Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Planar glasspassivated chips
- Short recovery time
- Low forward voltage drop
- Short recovery behaviour
- UL registered, E 148688

### Applications


- Inductive heating and melting
- Free wheeling diode in converters and motor control circuits
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

### Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

### Package, style and outline

Dimensions in mm (1mm = 0.0394")

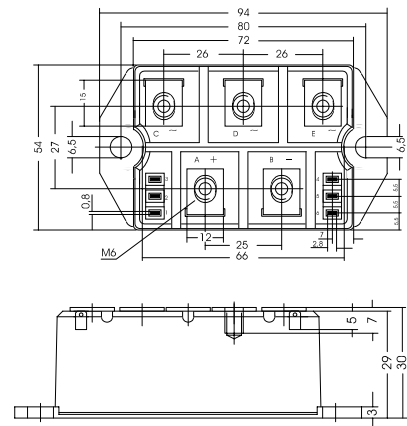

Symbol	Test Conditions	Characteristic Value
$I_R$	$V_R = V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$	max. 12 mA
	$V_R = 0.8 \cdot V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$	max. 3 mA
	$V_R = 0.8 \cdot V_{RRM}$ $T_{VJ} = T_{VJM}$	max. 60 mA
$V_F$	$I_F = 150 \text{ A}$ $T_{VJ} = 25^\circ\text{C}$	$\leq 1.55 \text{ V}$
$t_{rr}$	$T_{VJ} = 25^\circ\text{C}$ ; $I_F = 1 \text{ A}$ ; $-di_F/dt = 400 \text{ A}/\mu\text{s}$ $V_R = 30 \text{ V}$	typ. 100 ns
$I_{RM}$	$I_F = 100 \text{ A}$ ; $-di_F/dt = 200 \text{ A}/\mu\text{s}$ ; $V_R = 100 \text{ V}$ $L \leq 0.05 \text{ mH}$ ; $T_{VJ} = 100^\circ\text{C}$	typ. 48 A
$V_{TO}$	For power-loss calculations only	0.5 V
$r_T$	$T_{VJ} = T_{VJM}$	0.75 $\text{m}\Omega$
$R_{thJH}$	per diode; DC current	0.57 K/W
$R_{thJC}$	per diode; DC current	0.42 K/W
$d_s$	Creeping distance on surface	10 mm
$d_A$	Creeping distance in air	9.4 mm
$a$	Max. allowable acceleration	50 $\text{m/s}^2$